


InTouch™ Wireless Controls

Model CA5500BR

Hand-Held Remote Control & Charger Base Station

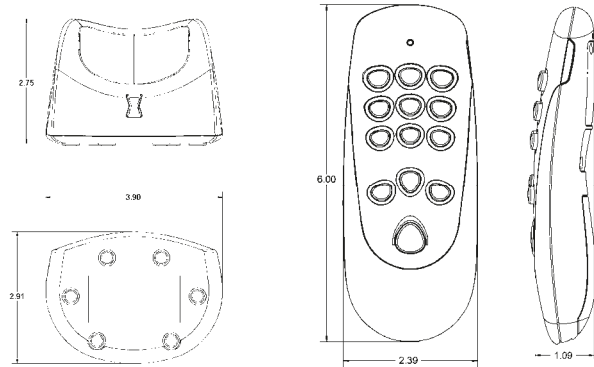

APPLICATIONS

- Hand-held device provides mobile control of up to nine scenes of control, ON/OFF, Raise/Lower and server base charger

SPECIFICATIONS

Operating Temperature Range: 32°F (0°C) to 104°F (40°C)

Rechargeable Nickel Metal Hydride Caution:

To avoid fire or serious damage to the remote control, use only Intermatic CA5500BAT replacement battery.

WALL-PACK TRANSFORMER:

Input: 120VAC, 50/60Hz

Output: 9VDC 500ma (CATRFM)

RF INFORMATION

Minimum Range: 50ft indoor; 100ft outdoor

Frequency: 908.42 MHz

NETWORK INFORMATION:

Mesh Network: Each line powered node acts as a repeater to route distant signals

Data Rate: 9600 bits/second

Size: 232 Z-Wave Nodes



The CA5500BR Remote and Base Station are enhanced radio frequency controllers compatible with Z-Wave™ enabled networks and devices. Each line powered node in a Z-Wave network is designed to act as a repeater forming a mesh network eliminating radio “dead spots” and providing the highest level of reliability.

Features

- Provides InTouch™ server function for enhanced Z-wave capabilities including; extended signal hopping, full status of InTouch and legacy Z-Wave devices, system messaging, in-field firmware upgrades, advanced scene control, and much, much, more.
- Multiple location On/Off & Raise/Lower control when used with Z-Wave enabled devices.
- Allows control of up to 9 individual pre-set scenes containing any number of Z-Wave enabled devices.
- Features individual scene status feedback for enhanced control.
- Separate focus and control buttons allows the user to custom mix scene selections and device levels.
- Home key provides for quick de-selection of scenes.

Installation Data

